

Metallic Pigmented High-Wear System

SYSTEM DETAILS

Metallic-Tread High Wear Systems are a premium quality reflective metallic epoxy flooring system with a high traffic, low semi-gloss urethane finish. The system combines the strength and durability characteristics of industrial coatings and the reflective properties of the metallic pigments to create a unique and eye-catching effect.

Series N222 Deco-Tread

A low ambering, multi-purpose epoxy coating with enhanced UV stability and resistance to yellow. Series N222 can be used as a primer, broadcast, slurry/broadcast, mortar, grout coat, metallic color coat, and topcoat. It provides excellent application properties with good flow and self-leveling characteristics. It protects concrete surfaces from impact and abrasion and has excellent chemical resistance with an aesthetically pleasing appearance.

Series 248 EverThane

Extremely hard, chemical-resistant urethane floor coating with superb wear characteristics. Excellent resistance to abrasion, wet conditions, corrosive fumes and chemical contact. Excellent gloss and color retention. Low odor characteristic allows for use near occupied space.




FEATURES AND BENEFITS

- Available in standard and custom colors
- Seamless and easy to clean
- Low odor for use near occupied space
- Resistant to ambering and color change
- Exceptional stain resistance (chemicals, tires)
- Exceptional chemical and abrasion resistance
- Light reflectance for safety and energy conservation

COMMON AREAS OF USE

- Hotels and Resorts
- Restaurants
- Churches
- Laboratories
- Educational Facilities
- Healthcare Facilities
- Museums
- Office Spaces
- Aircraft Hangars

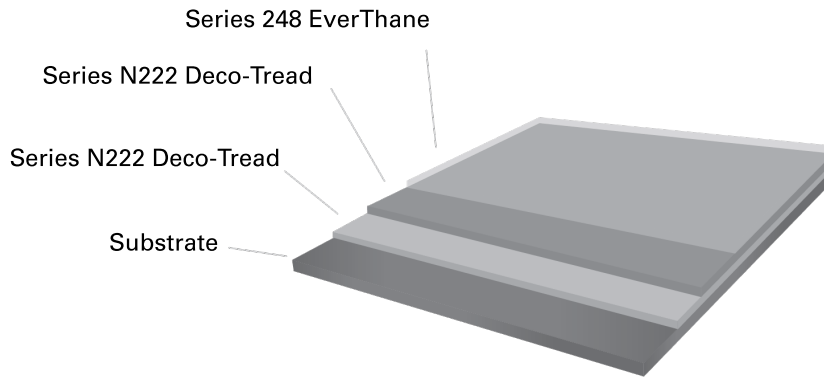

SYSTEM SPECIFICATIONS

Coating	Tnemec Product	Typical Thickness	Additional Information
Primer	Series N222 Deco-Tread with 820 Field Colorant	8.0–12.0 Mils	Product Data Sheet
Intermediate	Series N222 Deco-Tread, with metallic color pigments	16.0–20.0 Mils	Product Data Sheet
Topcoat	Series 248 EverThane	2.0–3.0 Mils	Product Data Sheet

THE RIGHT SYSTEM FOR YOUR PROJECT

For help determining the best coating system for your needs, contact your local Tnemec representative. Our representatives are among the most tenured and knowledgeable experts in the industry and can help you understand the benefits of specifying and applying the ideal coating system on your structures.

 **SpecLink** This flooring system is integrated in RIB SpecLink and available to specify within your workflow.

Published technical data, instructions and pricing are subject to change without notice. Contact your Tnemec technical representative for current technical data, instructions and pricing. Warranty information: The service life of Tnemec's coatings will vary. For warranty, limitation of seller's liability and product information, please refer to Tnemec Product Data Sheets at tnemec.com or contact your Tnemec technical representative. © Tnemec Company, Inc. FS4